




# **AMAZONICA WALLS**

ACCESSORIES	15
MOSAIC STONE ENSEMBLE CLASSICAL ROCK ESSENCE	11 13
DAWN STONE SLATE CONTOUR NOCTURNE ROCK	05 07 09
PRODUCT SERIES	05
SPECIFICATIONS	04
MATERIAL ADVANTAGES SERIES	01 02 03
PRODUCT PROFILE	UI



# **MATERIAL**



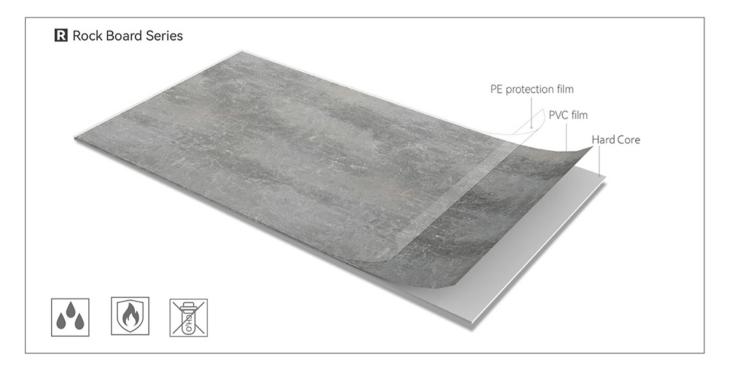

- Hard Core High-performance composite panels that combine the exceptional qualities of stone and plastic, delivering outstanding strength and resilience.
- **Decor Film Layer** We offer widely popular texture patterns suitable for various home styles. Our high-definition, intricate textures closely mimic real materials.
- UV Coating Layer High-performance UV coating treatment can effectively prevent damage to the board caused by ultraviolet rays.

# **ADVANTAGES**





# Waterproof

Hard Core UV BOARD has the advantage of being waterproof and moisture-resistant, addressing the weakness of traditional wall panels that are susceptible to water.



### Fireproof

The combustion test level reaches B1, and the material is effectively fireproof.



### Eco-Friendly

Eco-friendly and formaldehyde-free, it is a new type of green and environmentally friendly decorative material.



# Easy to Install

Installation is convenient, saving a considerable amount of time and money



### Easy to clean

The surface is smooth and easy to clean, preventing the accumulation of stains.



### Diverse design options


Offers a wide range of textures and colors suitable for various interior design styles, meeting diverse needs.

01 02





# SERIES

# Dawn Stone 🚹 🐧 🛣

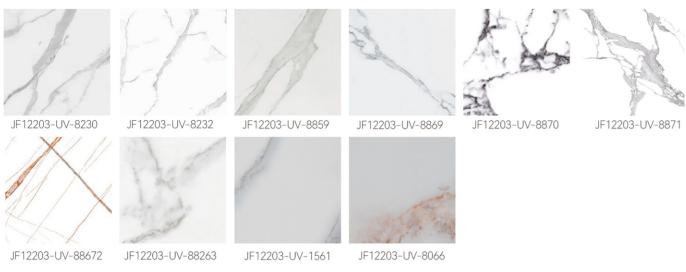


# Slate Contour M 🐧 🕅



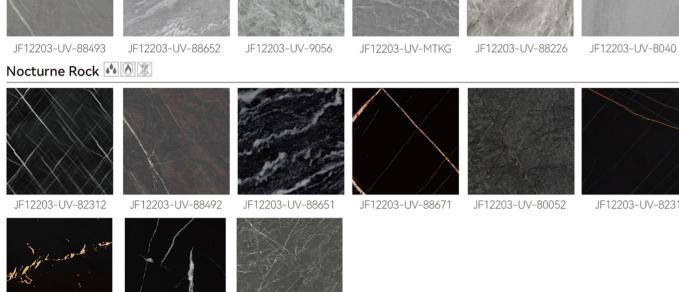


Mosaic Stone Ensemble 🔥 🐧 🛣

JF12203-UV-06W1

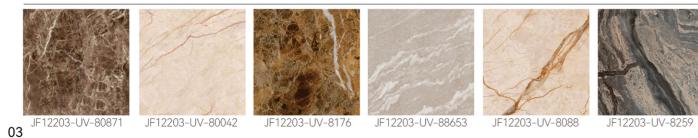

JF12203-UV-8803

# Classical Rock Essence

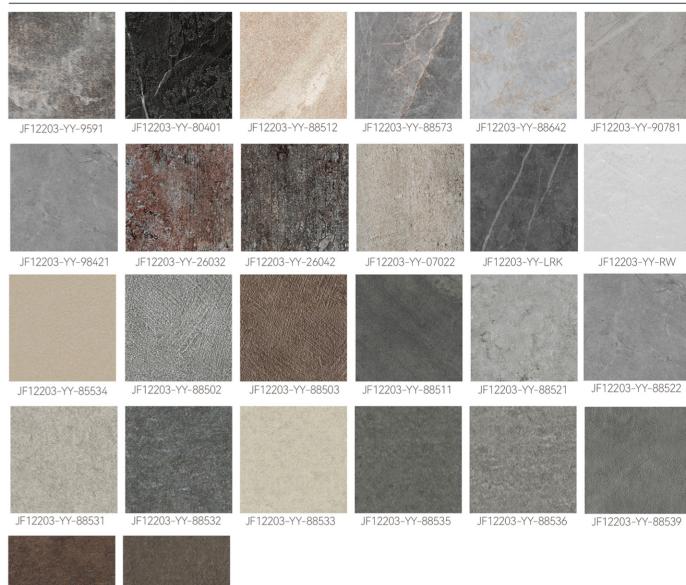

JF12203-YY-88538 JF12203-YY-88539

# **SPECIFICATIONS**

Item	AMAZONICA Wall Panel	Packing	100PCS/PALLET, 1400pcs/20GP, 26.6t/20GP
Process Type	Extrusion+hot-stamping+UV coating+PE protection film/ Extrusion+PVC film+PE protection film	Weight	6.2KG/m²
Material	PVC+Calcium powder+Additive	Density	2000kg/m³
Size	1220*2440MM (Standard exporting size), or 1220*2800mm or customized	Certificates	Fire retardant grade:B1
Product series	Dawn Stone, Nocturne Rock, Slate Contour, Mosaic Stone Ensemble, Classical Rock Essence	Installation	Glue+Aluminium profile
Thickness	3mm		

31 12203 07 00071 31 12203 07 00072 31 12203 07 00003 31 12203 07 0000 31 12203 07 0000 (170 1203 07 0000)



# **DAWN STONE** M

















JF12203-UV-88672



JF12203-UV-1561



JF12203-UV-8066



JF12203-UV-8870



JF12203-UV-8230




# **SLATE CONTOUR** M









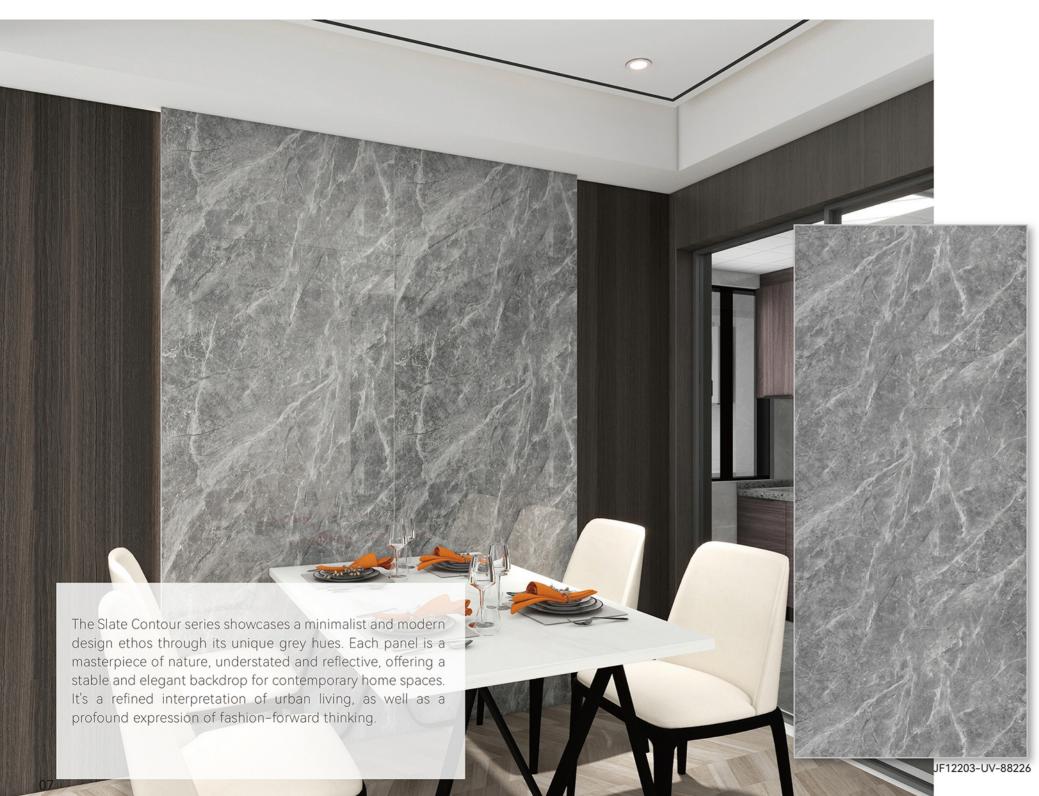




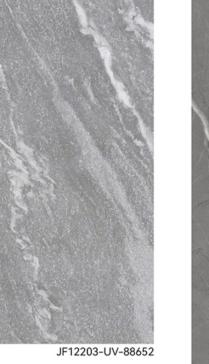



JF12203-UV-8040



JF12203-UV-9056




JF12203-UV-MTKG



# **NOCTURNE ROCK M**





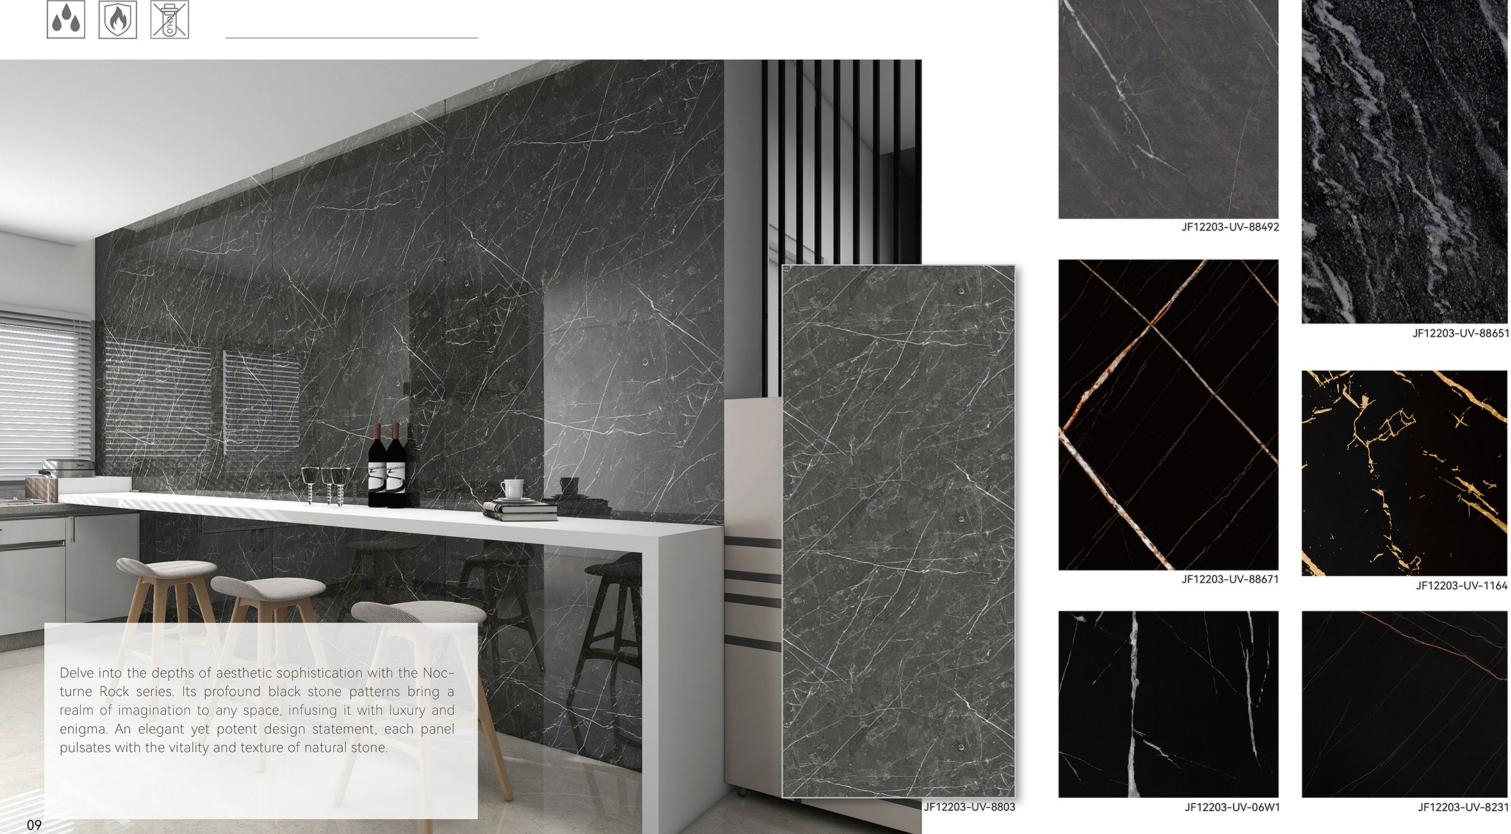




# MOSAIC STONE ENSEMBLE M








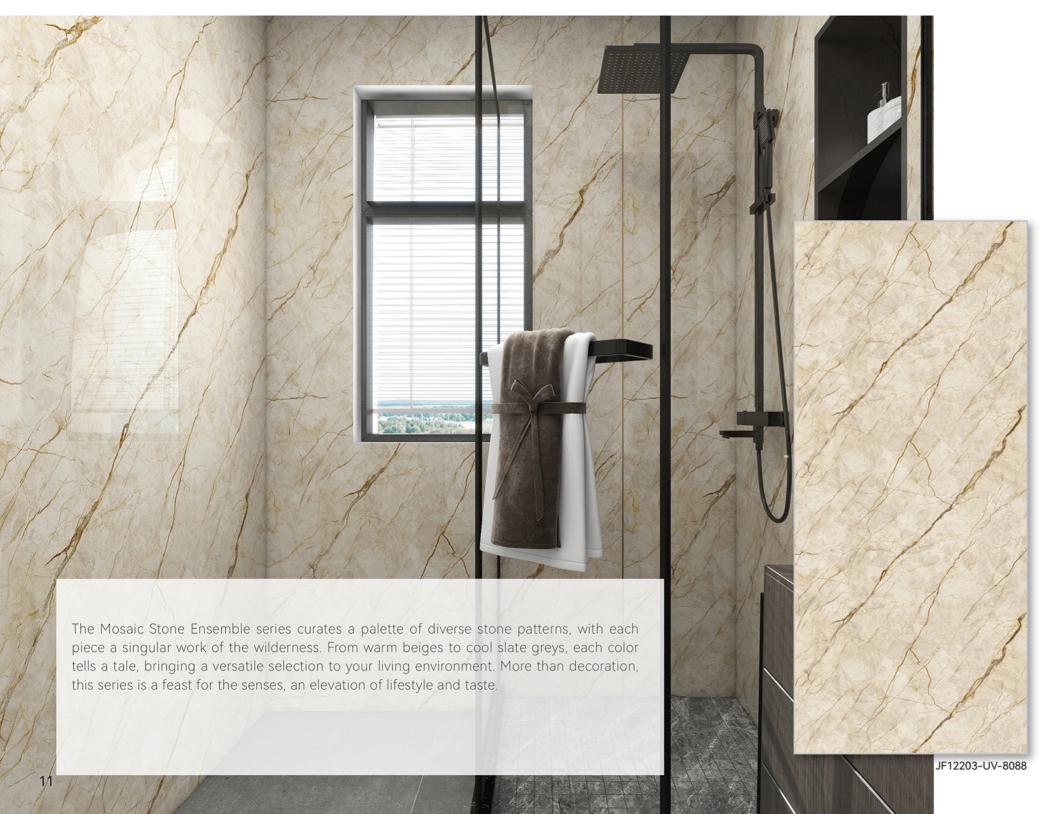







JF12203-UV-8176








# CLASSICAL ROCK ESSENCE R







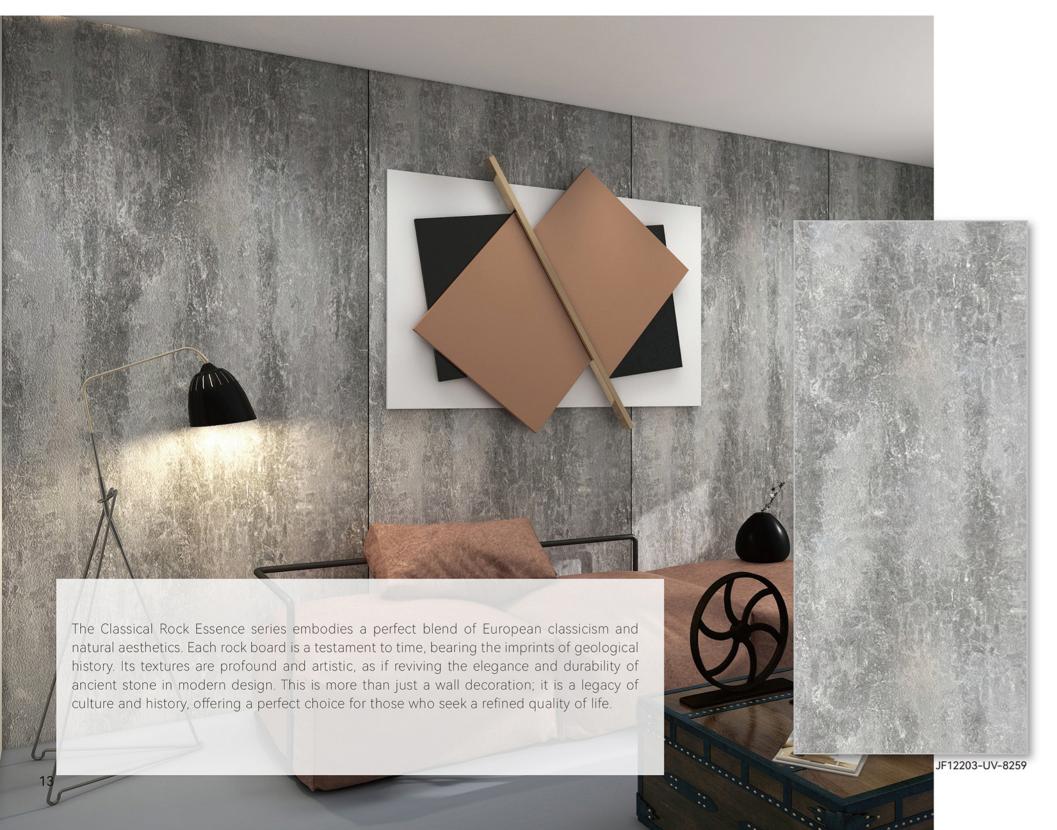









JF12203-YY-88512







JF12203-YY-88521

JF12203-YY-88532






JF12203-YY-88539

JF12203-YY-88511



# **ACCESSORIES**

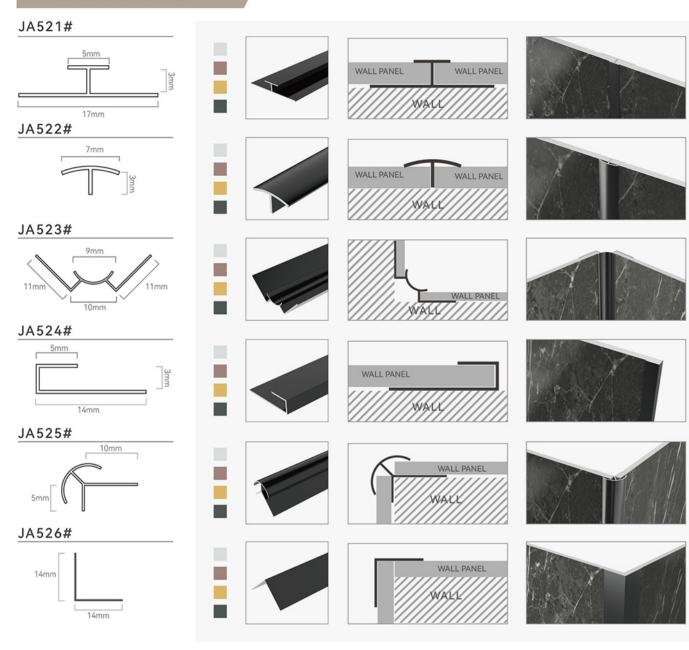

# PREMIUM NEUTRAL SILICONE SEALANT



# **DESCRIPTION**

It is a one-component, medium modulus, neutral silicone sealant, demonstrating good adhesion to most common buildingmaterials, e.g. metal, stone, glass, non-oily wood, silicone rubber, ceramic, natural and synthetic fiber, brick, concrete, painted and many plastic surfaces.

# WHERE TO USE

It is fit for sealing movement joints of door and windowand others', where durable and fast bonding is expected. Apply sealant when surface temperature is between 5°C to40°C.

- Easy to Use
- Excellent Adhesion
- ✓ Waterproofing













# INSTALLATION

# **Tools to Prepare**

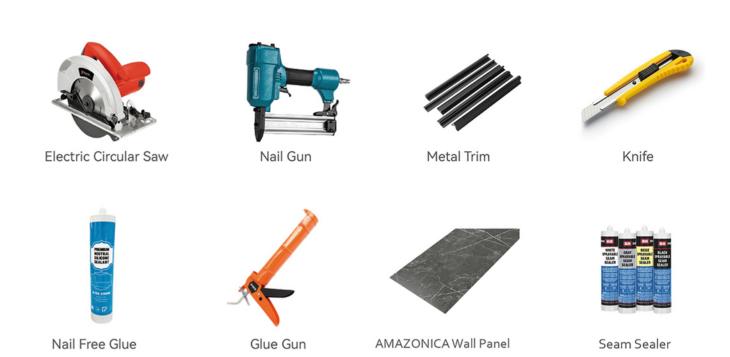

# Installation



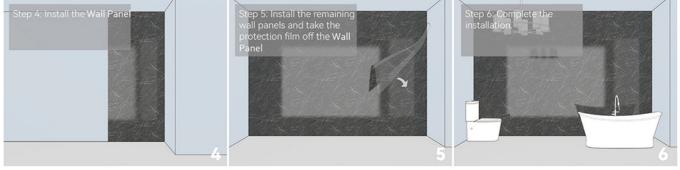

15

# Amazonica Group www.amazonicagroup.com